


# SIGNODE® GripPack SLB



Battery-powered combination tool for steel strap

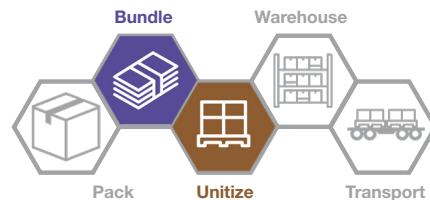

**Innovative design**

Industry proven, high quality tool with outstanding reliability and unparalleled ergonomics



**Increases productivity**

Provides improved consistency and accuracy of tension levels for sealless joint applications



**Simplifies operation**

Lightweight design coupled with one-button operation helps reduce operator fatigue



**Lowers operating costs**

Offers significant cost-savings compared to the high cost and operational inefficiencies of pneumatics

# Battery-powered combination tool for steel strap



The Signode GripPack SLB steel strap combination tool combines high tension and speed to deliver maximum power and performance for steel strapping applications. With automatic operation and numerous performance-enhancing features, it improves productivity for a wide range of product applications including tin plate, cut-to-length sheets, tubes, pipes, ingots, steel, large coils and more.



## Part of the GripPack family

Signode's line of GripPack battery-operated tools enhance productivity and operator safety for applications that utilize steel strapping.



## Features and benefits

- **Provides real-time information**  
 Integrated Bluetooth technology with a mobile application allows operators to wirelessly lock in operational settings across multiple shifts. To maximize tool longevity, the mobile application monitors cycle counts then provides ongoing alerts to ensure proactive maintenance.
- **Improves reliability**  
 Manufactured with Signode proven components, the GripPack SLB has fewer moving parts and requires less maintenance than pneumatic tools.
- **Maximizes productivity**  
 Complete with the latest "fast charge" lithium ion technology, the GripPack SLB battery can perform up to 100 tensioning, sealing and cutting cycles per charge and is fully recharged in just 30 minutes. An optional 18 Volt 4.0 Ah battery can extend operation from 100 to 200 cycles per charge.

### GripPack SLB Technical Specifications

Tool Model	SLB-12HS	SLB-58HS	SLB-34HS	SLB-34HT	
Part Number	801234	801233	801232	801231	
Kit Number*	110 Volt	801234K1	801233K1	801232K1	801231K1
	220 Volt	801234K2	801233K2	801232K2	801231K2
Performance	High speed			High tension	
Adjustable Tension	Up to 1,000 lbs (4448 N)			Up to 1,500 lbs (6672 N)	
Strap Type	Apex® and Magnus® steel strap				
Strap Width	1/2" (12 mm)	5/8" (16 mm)	3/4" (19 mm)		
Strap Gauge	.017" - .025" (0.43 mm - 0.63 mm)				
Seal Type	Sealless strap joint				
Joint Type	3-key				
Cycles per Charge	100+				
Battery+	18v 2Ah Lithium Ion				
Recharge Time	Full: 30 mins; 80%: 20 mins				
Tool Weight	14 lbs (6.35 kg) including battery				
Dimensions	14.5" x 6.88" x 5.25"				
	368.3 mm x 174.75 mm x 133.35 mm				

\*Tool kits include two standard batteries and charger

+Upgrade to the optional 18 Volt 4.0 Ah battery (200 cycles per charge)